

Luoyang Chuanzhi Environmental Technology



传智科技



We are a research and development, production and sales in one of the diversified companies, the main electromagnetic flow meter, vortex flow meter, ultrasonic flow meter production and sales.



Product	Turbine Flowmeter
Material	SS304/SS316
Input	24VDC/Battery
Output	4-20mA/RS485/Pulse/GPRS
Pressure	PN16
Inbreaking Protection	IP65
Size	DN25-DN2000



Product	Electromagnetic Flowmeter (Integral)
Material	Carbon steel/SS304/SS316
Input	24VDC/220VAC/Battery
Output	4-20mA/RS485/Pulse/Hart/GPRS
Linner	Rubber/PTFE
Connection	Flange/Tri-clamp/Thread
Pressure	PN16
Inbreaking Protection	IP65/IP68
Electrode	316L
Size	DN6-DN2000



Product	Electromagnetic Flowmeter (Split)
Material	Carbon steel/SS304/SS316
Input	24VDC/220VAC/Battery
Output	4-20mA/RS485/Pulse/Hart/GPRS
Linner	Rubber/PTFE
Connection	Flange/Tri-clamp/Thread
Pressure	PN16
Inbreaking Protection	IP65/IP68
Electrode	316L
Size	DN6-DN2000



Product	Vortex flowmeter
Material	SS304/SS316
Input	24V
Output	4-20mA/RS485
Temp.	Below 250 degrees
Connection	Flange/Flange bolts
Pressure	PN16
Inbreaking Protection	IP65/IP68
	Temperature and pressure in one!
Size	DN15-DN1200



Product	Electromagnetic Flowmeter
Type	Integrate/Split
Material	Plastic
Input	24VDC/220VAC
Output	4-20mA/RS485/Pulse
Connection	Thread
Size	DN80/DN100



Product	Electromagnetic Flowmeter
Type	Split
Material	Plastic
Input	24VDC or 220VAC
Output	4-20mA/RS485
Connection	Thread
Size	DN40/DN50




Product	Electromagnetic Flowmeter
Type	Integrate
Material	Plastic
Input	24VDC or 220VAC
Output	4-20mA/RS485
Connection	Thread
Size	DN40/DN50



Product	Hand-held Ultrasonic Flowmeter
Material	Plastic
Input	Battery
Connection	Clamp
Size	DN15-DN6000
Temp. range	-30-160°
Linearity	0.5%
Repetitive	0.2%



Product	Wall-mounted Ultrasonic Flowmeter
Material	Plastic
Input	24VDC or 220VAC
Output	4-20mA
Connection	Wall-mounted
Size	DN50- DN700
Temp. range	-30-160°
Linearity	1%
Repetitive	± 0.2%
Accuracy	± 1%

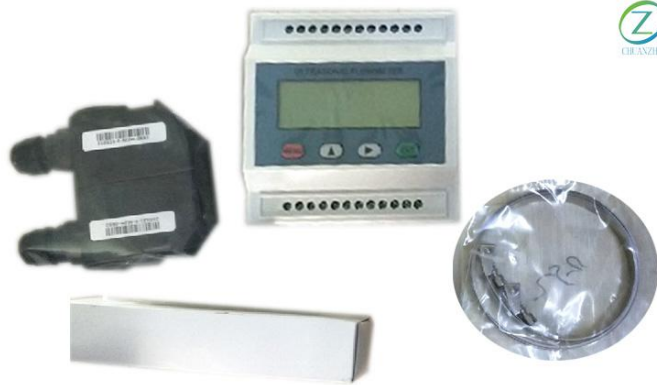

Product	Module Ultrasonic Flowmeter
Material	Plastic
Input	24VDC or 220VAC
Input	4-20mA
Connection	Clamp
Size	DN50- DN700
Temp. range	-20-80°
Cable	5*2M



Product	Open Channel Flowmter
Type	Integrate/Split
Material	Plastic
Input	220VAC
Input	4-20mA/RS485
Cable	10M



Product	Ultrasonic Flowmeter
Material	Carbon steel/SS304/SS316
Input	24VDC
Output	4-20mA/RS485
Connection	Pipe line
Pressure	PN16
Inbreaking Protection	IP65/IP68
Size	DN15-DN2000



Product	Gas Turbine Flowmeter
Material	Carbon steel/SS304/SS316
Input	Battery
Output	4-20mA/RS485/Pulse/GPRS
Pressure	PN16
Inbreaking Protection	IP65/IP68
Size	DN15-DN2000
	Temperature and pressure in one!



Product	Flow Totalizer
Material	Plastic
Input	24VDC
Output	4-20mA/RS485/GPRS/Pulse



Product	Ultrasonic level Gauge
Material	Plastic
Input	24VDC
Output	4-20mA/RS485
Range	0-6M




Product	Input level Gauge
Inbreaking Protection	IP65
Input	24VDC
Output	4-20mA/RS485
Range	0-10M




Product	Electromagnetic Flowmeter Converter (Integral)
Input	24VDC/220VAC/Battery
Output	4-20mA/RS485/Pulse/Hart/GPRS
Inbreaking Protection	IP65/IP68



Product	Electromagnetic Flowmeter Converter (Split)
Input	24VDC/220VAC/Battery
Output	4-20mA/RS485/Pulse/Hart/GPRS
Inbreaking Protection	IP65/IP68

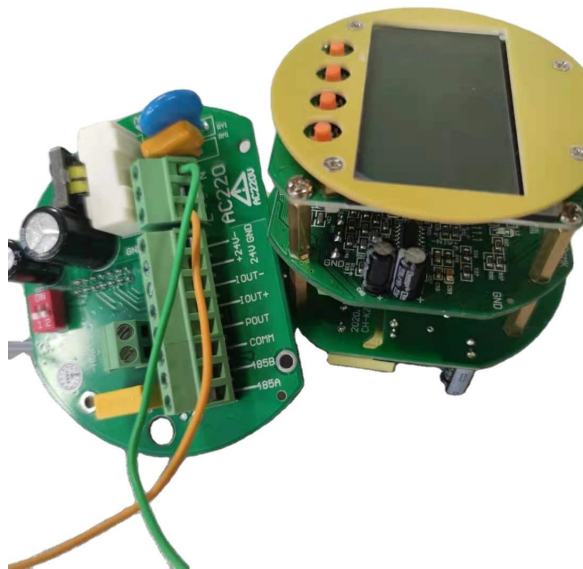

Product	Electromagnetic Flowmeter PCB(Integrate)
Input	24VDC/220VAC/Battery
Output	4-20mA/RS485/Pulse/Hart/GPRS

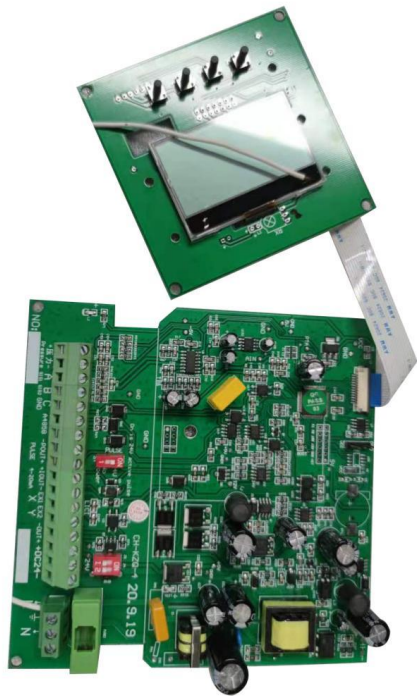

Product	Electromagnetic Flowmeter PCB(Split)
Input	24VDC/220VAC/Battery
Output	4-20mA/RS485/Pulse/Hart/GPRS



Product	Turbine Flowmeter Impeller
Material	SS304
Size	DN25-DN2000



Product	Turbine Flowmeter Impeller
Material	SS304
Size	DN25-DN2000



Product	Turbine Flowmeter Amplifier
Material	SS304
Size	DN25-DN2000